



Recommended tools:


- **Windshield removal tool or similar device.** (.025 In. Dia. Cable, 30 lb. test fishing line or a used guitar string can be substituted.)
- **Soft disposable rags**
- **Adhesive remover** (3M General Purpose Adhesive Remover #08984 is recommended)
- **Soft plastic scraper**

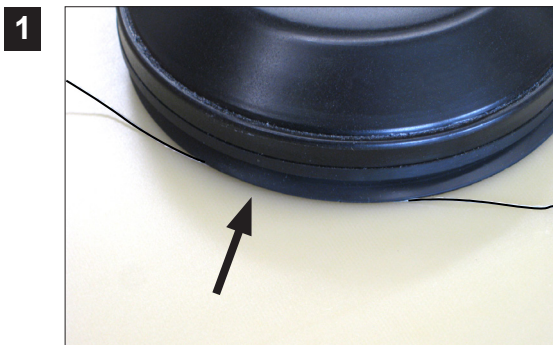

Slide a small diameter cable or cord under the gasket of the antenna. (See **Recommended tools** list above)

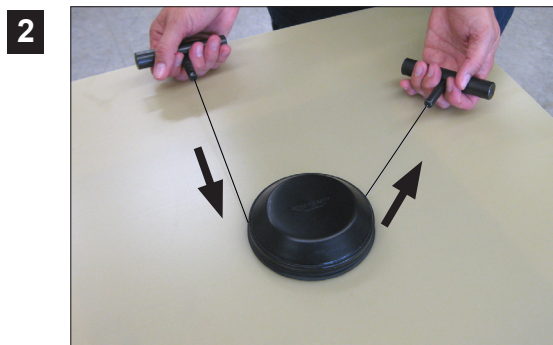


Pull the cable under the antenna and use a sawing action to cut the adhesive pad. **(CAUTION! Use care when cutting so you do not cut through the wire harness in the center of the antenna.)**

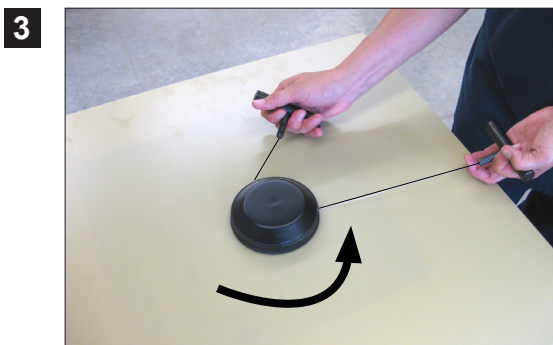

Continue cutting around the antenna to release the entire adhesive pad.



After cutting through the adhesive pad, remove the antenna and disconnect it from the wire harness.

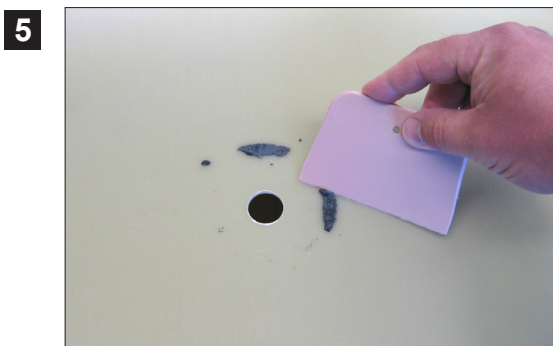

Remove any remaining pieces of the adhesive pad with the plastic scraper.



Using a quality adhesive removing solvent and a soft clean cloth to remove any of the remaining adhesive from the vehicle.