



NL-AT2

Solid Reliability and Unmatched Battery Life in Tracking Location, Motion, and Environmental Conditions of Your Assets.

Airgain Asset Tracking Solutions are edge-to-enterprise systems that allow you quickly track, protect and optimize your assets. Each deployment-ready solution tightly integrates asset tracking devices, network connectivity and software – all precisely configured to your use cases.


The AT2 is a versatile, ruggedized asset-tracking device that leverages cellular, GPS, Wi-Fi, and environmental sensors to deliver solid reliability for monitoring location, motion, temperature and humidity. The AT2 device is IP-67 rated for water and dust resistance, works indoors and out and carries a robust power management system delivering exceptional battery life. And, like all Airgain asset tracking devices, the AT2 supports multiple frequency bands and is globally capable.

FEATURES

- **Locate/Track:** Receive notifications at predefined times or thresholds
- **Geo/Time Fencing:** Recieve notifications as tracker penetrated predefined areas or time periods
- **Condition Monitoring:** Receive alerts based on environmental and physical conditions

ADVANTAGES

- Tightly integrated edge-to-enterprise solution
- LTE-M / NB-IoT, with 2G fallback
- Monitors location, motion, temperature, and humidity
- Industry-leading battery performance
- Highly configurable to your use case
- IP-67 water and dust resistant
- Drop resistant to six feet
- Globally capable – Multi-band support
- Enterprise integration – RESTful API / PubSub
- Flexible business models

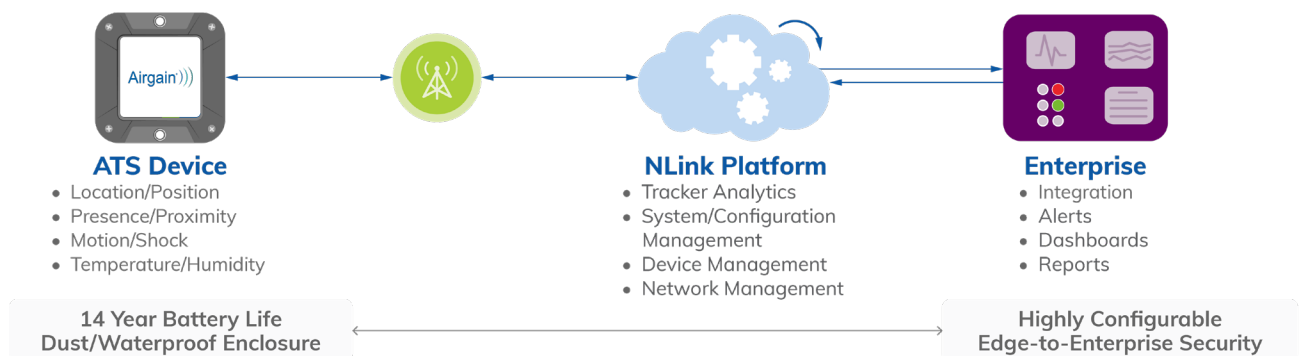

START TRACKING NOW

“Pilot-in-a-box” - Our Asset Tracking Deployment Kit Includes:

- 3 Trackers
- 3 Months
 - Cellular Connectivity
 - NLink
 - Access to a Dashboard
- To purchase a Deployment Kit, visit go.nimbelink.com
- To learn more, contact us at www.airgain.com/contact



TECHNICAL SPECIFICATIONS

TARGET REGION

NL-AT2VS, NL-AT2VQ, NL-AT2AQ	North America
------------------------------	---------------

NL-AT2OQ	Europe
----------	--------

CELLULAR TECHNOLOGY

LTE Category	LTE-M, NB-IoT
--------------	---------------

LTE Frequency Bands	LTE FDD: B1, B2, B3, B4, B5, B8, B12, B13, B18, B19, B20, B26, B28 LTE TDD: B39 (Cat M1/LTE-M Only)
---------------------	--

2G Frequency Band	GSM850, GSM900, DCS1800, PCS1900
-------------------	----------------------------------

HARDWARE

Dimensions	4" x 4" x 1" (101.6 x 101.6 x 25.4mm)
------------	---------------------------------------

Weight	8 oz
--------	------

Rugged	IP67
--------	------

Environment	-30 to +60C (-22°F to 140°F)
-------------	------------------------------

LOCATION SERVICES

Cellular	Cell Tower Triangulation, 1,000-50,000m
----------	---

GPS	Satellite Triangulation, 5m-100m
-----	----------------------------------

Wi-Fi	Wi-Fi Access Point Triangulation, 10-250m
-------	---

Geofencing	Geofencing Capable – Configure using the NLink Platform
------------	---

SENSORS

	Temperature, Humidity			
	Accelerometer			
	GPS			
	Wi-Fi			

BATTERY LIFE	USE CASE #1	USE CASE #2	USE CASE #3	USE CASE #4
Check-ins per Day	1	4	24	96
Location Scans per Day	1	4	24	96
Battery Life ¹	14+ years	4+ years	9+ months	2+ months

¹ Wi-Fi and cellular location scans enabled, all other sensors disabled. 0% cellular connection fail rate, 0% location scan failure rate.