



NL-AT4+

The low-cost, power-friendly way to track your assets - indoors and out.

Asset Tracking Solutions are highly configurable and scalable, edge-to-enterprise solutions that allow you to quickly track, protect and optimize your assets. Each application-ready Solution tightly integrates asset tracking devices, network connectivity, and software – all of which are precisely configured to your use cases.


The AT4+ device leverages LTE-M cellular connectivity, cellular, GPS, and Wi-Fi triangulation for location services, and a 3-axis accelerometer for monitoring movement. The NLink Platform enables you to quickly configure your AT4+ device to your use cases, and seamlessly connect to your enterprise. The rechargeable AT4+ operates on a lithium-ion battery and is IP-66 dust and water-resistant. And like all Airgain asset tracking devices, the AT4+ is globally capable, supporting multiple frequency bands.

FEATURES

- **Locate/Track:** Receive notifications at predefined times or thresholds
- **Geo/Time Fencing:** Recieve notifications as tracker penetrated predefined areas or time periods

ADVANTAGES

- Highly configurable to your use case
- Tightly integrated edge-to-enterprise solution
- Enterprise integration – RESTful/PubSub
- Latest LTE-M/NB-IoT technology
- Globally capable – multi-band support
- Small footprint - lightweight
- IP-66 water and dust resistant
- Rechargeable batteries

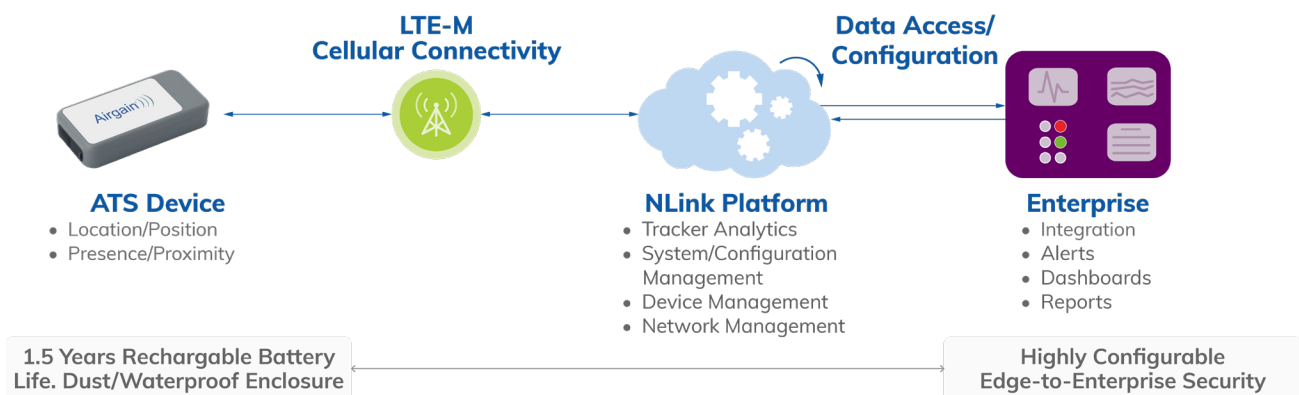

START TRACKING NOW

“Pilot-in-a-box” - Our Asset Tracking Deployment Kit Includes:

- 3 Trackers
- 3 Months
 - Cellular Connectivity
 - NLink
 - Access to a Dashboard
- To purchase a Deployment Kit, visit go.nimbelink.com
- To learn more, contact us at www.airgain.com/contact



TECHNICAL SPECIFICATIONS

TARGET REGION

NL-AT4+	Global
---------	--------

CELLULAR TECHNOLOGY

LTE Category	LTE-M, NB-IoT
LTE Frequency Bands	LTE FDD: B1, B2, B3, B4, B5, B8, B12, B13, B18, B19, B20, B26, B28 LTE TDD: B39 (Cat M1/LTE-M Only)
2G Frequency Band	GSM850, GSM900, DCS1800, PCS1900

HARDWARE

Dimensions	3.1" x 1.5" x 0.56" (75.5 x 34.5 x 13mm)
Weight	1.5 oz
Rugged	IP66
Environment	-20 to +60C (-4°F to 140°F)

LOCATION SERVICES

Cellular	Cell Tower Triangulation, 1,000-50,000m
GPS	Satellite Triangulation, 5m-100m
Wi-Fi	Wi-Fi Access Point Triangulation, 10-250m
Geofencing	Geofencing Capable – Configure using the NLink Platform

SENSORS

Motion Detection	3-Axis Accelerometer
Flight Detection	Pressure
Tamper Detection	Light

BATTERY

Rechargeable	Lithium Ion			
BATTERY LIFE	USE CASE #1	USE CASE #2	USE CASE #3	USE CASE #4
Check-ins per Day	1	4	24	96
Location Scans per Day	1	4	24	96
Battery Life ¹	17 months	7 months	41 days	11 days

¹ Wi-Fi and cellular location scans enabled, all other sensors disabled. 0% cellular connection fail rate, 0% location scan failure rate.