


# M2MAX<sup>®</sup> CCWWG

## Double Cell and Wi-Fi IP67 Antenna with GNSS

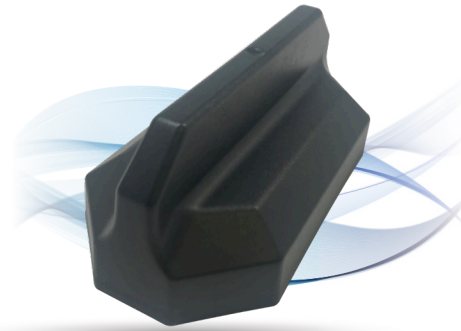

M2MAX CCWWG is a fully rugged outdoor antenna designed specifically for M2M applications. This antenna provides best in class performance and is configurable, providing two high gain cellular/LTE, two dual band Wi-Fi and GNSS antennas inside a single robust and compact housing.

- 2 x Wideband Cellular/LTE Elements (MIMO)
- 2 x 2.4 & 4.9-6 GHz Wi-Fi Element (MIMO)
- 1 x GNSS Antenna
- Leading LTE performance while in coexistence with multiple other embedded antenna technologies
- Lower profile and smaller footprint than competing solutions
- Must be mounted on metal
- Available in black or white
- US Patent 10109918

### Descriptions/Applications

The M2MAX CCWWG antenna builds on the best in class RF performance, leading design, features, and extended product life tradition of this highly successful product line. Ideal for kiosks, digital signage, wireless ATMs, vending machines, NEMA enclosures, industrial metering and other wireless machine to machine applications. This antenna has been designed to mount externally to an M2M or IoT enabled asset, and requires no servicing through its life time.

- Optimal MIMO Performance for LTE**: Icon showing MIMO signal waves.
- Compact and Robust UV Resistant Housing**: Icon showing a UV shield over a device.
- Full Outdoor Installation Ready**: Icon showing a cloud with a checkmark and rain.
- Customizable Cables and Connectors to Connect to Any Modem**: Icon showing various cable connectors.
- Flexible Mounting Options**: Icon showing the antenna being attached to different surfaces.
- Fast custom turnaround time**: Icon showing a lightning bolt.
- Low loss cable accessories**: Icon showing a cable with a connector.
- Bolt Mount**: Image of the antenna with a bolt and nut.
- Adhesive Mount**: Image of the antenna with a red adhesive pad.
- Magnetic Mount**: Image of the antenna with a magnetic base.

### Standard Configurations

<b>AP-M2M2-CCWWG-Q-S22222-RP34-BL-15</b>	MIMO Cell/LTE x 2, Wi-Fi x 2 & GNSS, Threaded bolt mount, SMA on Cell/LTE & GNSS, RP-SMA on Wi-Fi, Black, 15ft coax
<b>AP-M2M2-CCWWG-A-S22222-RP34-BL-15</b>	MIMO Cell/LTE x 2, Wi-Fi x 2 & GNSS, Adhesive mount, SMA on Cell/LTE & GNSS, RP-SMA on Wi-Fi, Black, 15ft coax
<b>AP-M2M2-CCWWG-M-S22222-RP34-BL-15</b>	MIMO Cell/LTE x 2, Wi-Fi x 2 & GNSS, Magnetic mount, SMA on Cell/LTE & GNSS, RP-SMA on Wi-Fi, Black, 15ft coax

*Also available in color white, customizable cable lengths up to 35 feet, and other connector variations.*

### Electrical Data

Frequency Range	Antennas 1 & 2	698-960/1700-2700 MHz	
	Antennas 3 & 4	2.4/4.9-6.0 GHz	
	Antenna 5	1550~1610 MHz	
Operational Bands	Antennas 1 & 2	LTE/Cellular	
	Antennas 3 & 4	Wi-Fi	
	Antenna 5	GPS L1/GALILEO E1/GLONASS G1/BeiDou B1/ QZSS L1	
Peak Gain: Isotropic	Antennas 1 & 2	698-960 MHz	3.0 dBi
		1710-2700 MHz	6.0 dBi
	Antennas 3 & 4	2.4 GHz, 5.5 GHz	6.5 dBi, 4.2 dBi
	Antenna 5	30.5 dBi	
Isolation	Antennas 1 & 2	> 10 dB	
	Antennas 3 & 4	> 30 dB	
Correlation Co-efficient	Antennas 1 & 2	< 0.1	

### Environmental Data

Hazardous Substances	RoHS Compliant
Temperature	-40°C to 65°C (-40°F to + 149°F) Operating and Storage conformance to IEC 60068
Humidity (Non-Condensing)	5% to 96% Operating and Storage conformance to IEC 60068
Water Ingress	IP67
Military Spec	MIL-STD 810 conformance to vibration

### Mounting Data

Dimensions	Height	2.19" (55.5mm)
	Width	2.56" (65mm)
	Length	4.84" (122.9mm)
Color	Black (BL) or White (WH)	

### Cable Data- Cell/LTE

Type	CFD195 Low Loss
Diameter	0.195" (4.953 mm)
Length	1 feet (0.3 m)
Termination	SMA Male

### Cable Data- Wi-Fi

Type	CFD195 Low Loss
Diameter	0.195" (4.953 mm)
Length	1 feet (0.3 m)
Termination	RP-SMA Male

### Cable Data- GNSS

Type	RG-174U
Diameter	0.100" (2.54 mm)
Length	1 feet (0.3 m)
Termination	SMA Male

### GNSS Data - Ceramic Patch Antenna Specification

Bandwidth	1561 – 1602 MHz
Gain@Zenith	2.5 dBi
Polarization	R.H.C.P.
Axial Ratio	3.0 dB Typ.

### GNSS Data - LNA Specification

Noise Figure	1.2 dB
Gain	28 dBi
Voltage	3.3V~5.6V
Current	9.6±1mA@3.3V