

# Skywire® 4G LTE Cat M1 Modem

## Linux Networking Guide

NimbeLink Corp.

Updated: October 2022



© NimbeLink Corp. 2022. All rights reserved.

NimbeLink Corp. provides this documentation in support of its products for the internal use of its current and prospective customers. The publication of this document does not create any other right or license in any party to use any content contained in or referred to in this document and any modification or redistribution of this document is not permitted.

While efforts are made to ensure accuracy, typographical and other errors may exist in this document. NimbeLink reserves the right to modify or discontinue its products and to modify this and any other product documentation at any time.

All NimbeLink products are sold subject to its published Terms and Conditions, subject to any separate terms agreed with its customers. No warranty of any type is extended by publication of this documentation, including, but not limited to, implied warranties of merchantability, fitness for a particular purpose and non-infringement.

NimbeLink is a registered trademark, and Skywire is a registered trademark, of NimbeLink Corp. All trademarks, service marks and similar designations referenced in this document are the property of their respective owners.

# Table of Contents

Table of Contents	2
1. Introduction	4
1.1 Scope	4
1.2 Overview	4
1.3 Orderable Part Numbers	5
2. Preliminary Setup Procedure	5
2.1 Linux PC Setup	5
2.1.1 Notes	5
2.1.2 Elevate to Root	5
2.1.3 Check for Package Updates	5
2.1.4 Install Required Packages	5
2.1.5 Install Optional Packages	6
2.1.6 Linux Namespaces	6
2.2 Skywire Modem Setup	8
2.2.1 Prepare the Hardware	8
2.2.2 Configure the Modem's USB Composition	8
2.2.3 Verify Modem Enumeration	9
2.2.4 Load the "option" Driver (If Needed)	10
3. Point-to-Point Protocol (PPP)	11
3.1 Overview	11
3.2 PPP Scripts	11
3.2.1 NimbeLink PPP Script GitHub Repository	11
3.2.2 Create PPP Scripts	11
3.2.3 Edit the "x-TG1WWG-chat" Script	12
3.2.4 Edit the "x-TG1WWG" Script	13
3.3 Choose a PPP Implementation	13
3.4 Standard PPP Procedure	14
3.4.1 Take down Network Interfaces	14
3.4.2 Start the PPP Session	15
3.4.3 Test the PPP Session	15
3.4.4 Close the PPP Connection	15

3.5	Alternate Procedure for Testing PPP	16
3.5.1	Create a Network Namespace	16
3.5.2	Start the PPP Session	16
3.5.3	Test the PPP Connection	17
3.5.4	Close the PPP Connection	18
3.5.5	Delete the Linux Namespace	18
3.6	PPP Troubleshooting	19
4.	CDC_ECM	20
4.1	Overview	20
4.2	Preliminary Skywire Configuration	20
4.2.1	Verify USB Composition	20
4.2.2	Configure a PDP Context	21
4.2.3	Activate CDC_ECM	21
4.3	Choose a CDC_ECM Implementation	22
4.4	Standard CDC_ECM Procedure	22
4.4.1	Take down Network Interfaces	22
4.4.2	Identify the wwan[#] Interface	23
4.4.3	Enable the wwan# Interface	23
4.4.4	Dynamically Configure IP Address of wwan[#] Interface	24
4.4.5	Test the CDC_ECM Connection	25
4.4.6	Close the CDC_ECM Connection	25
4.5	Alternate CDC_ECM Procedure	26
4.5.1	Create a Linux Namespace	26
4.5.2	Identify the wwan[#] Interface	26
4.5.3	Pass the wwan[#] Interface to the Linux Namespace	27
4.5.4	Enable the wwan[#] Interface	27
4.5.5	Dynamically Configure IP Address of wwan[#] Interface	28
4.5.6	Test the CDC_ECM Connection	29
4.5.7	Close the CDC_ECM Connection	29
4.5.8	Delete the Linux Namespace	29
4.6	CDC_ECM Troubleshooting	30
5.	Document Version Information	31

# 1. Introduction

## 1.1 Scope

This document serves as a networking guide for NL-SW-LTE-TG1WWG Skywire modem and Linux host systems running Debian-based operating systems.

## 1.2 Overview

This application note covers four networking protocols for Linux environments, PPP and CDC\_ECM

All protocols allow Skywire modems to provide an Internet connection when connected over USB. The Internet connection provided by the modem behaves similarly to an Ethernet connection, so this networking technique is often called "Ethernet over USB".

For connections over UART, PPP can be used.

[Section 2](#) covers preliminary steps that should be performed, including: checking for package updates, downloading new packages, powering on the modem, and verifying modem enumeration on the Linux PC. Follow the instructions in this section before trying the following.

Linux users can choose from PPP and CDC\_ECM protocols when establishing an Ethernet over USB connection:

- [Section 3](#): Point-to-Point Protocol (PPP)
- [Section 4](#): Communications Device Class Ethernet Control Model (CDC\_ECM)
- [Section 5](#): Mobile Broadband Interface Model (MBIM)
- [Section 6](#): Qualcomm Mobile Station Modems (MSM) Interface (QMI)

**Note:** *CDC\_ECM, MBIM, and QMI generally have higher download and upload speeds than PPP.*

The networking methods described in this guide have been tested on the following Linux distributions:

- Ubuntu 18.04 LTS
- Ubuntu 20.04 LTS
- Debian 9.5 2018-10-07

## 1.3 Orderable Part Numbers

Orderable Device	Cellular Carrier	Network Type
NL-SW-LTE-TG1WWG	AT&T, Verizon	LTE, 4G
NL-SWDK	Any	Any

## 2. Preliminary Setup Procedure

### 2.1 Linux PC Setup

#### 2.1.1 Notes

The commands in this guide are for the Debian and Ubuntu listed in Section 1.2. If you are using a different Linux distribution, please modify the commands as needed.

*\*If using Ubuntu, it is recommended to stop the pre-packaged service 'ModemManager' by issuing the Linux command:*

**service ModemManager stop**

'ModemManager' is the default service used in the GUI Desktop application for using USB modems, this service may send unwanted configurations or AT commands to the modem during testing.

#### 2.1.2 Elevate to Root

To make the process easier, it is best to elevate to root before continuing with this guide. To do so, open a Linux terminal, and issue the following command:

**sudo -i**

#### 2.1.3 Check for Package Updates

Ensure that host system has the most recent versions of installed packages by issuing the following command:

**apt update && apt upgrade**

This command will check for package updates, and then perform any updates it finds.

#### 2.1.4 Install Required Packages

Additional packages may need to be installed on the Linux PC, depending on the networking protocol(s) that will be tested:

- **PPP**

- `pppd` - Point-to-Point Protocol Daemon.
  - Install with: **`apt install ppp`**
  - The "ppp" package adds a background process that handles PPP traffic alongside the kernel's PPP driver. This is known as a PPP daemon (PPPd).
  - For more information, see the following man page:  
<https://manpages.debian.org/testing/ppp/ppp.1.en.html>

- **CDC\_ECM**

- No additional packages required.

## 2.1.5 Install Optional Packages

Depending on the chosen method of communication between the Linux PC and the Skywire, additional package installations may be required:

- `picocom` - Minimal Dumb-Terminal Emulation Program
- Install with: **`apt install picocom`**
- NimbeLink recommends using `picocom` to handle serial and USB communication between the modem and the Linux host PC.
- For more information, see the following man page:  
<https://linux.die.net/man/8/picocom>
- Any similar package, like `minicom`, can be used instead of `picocom`, if desired.

## 2.1.6 Linux Namespaces

In addition to the standard procedures for PPP and CDC\_ECM, this application note has alternate instructions that make use of Linux Namespaces.

A namespace is a container within the operating system that allows for certain processes or resources to be isolated from the rest of the system. Specifically, a Network namespace can be used to isolate the Ethernet-over-USB connection from any other network interfaces that may be present on the host PC.

This approach is helpful while testing an implementation of the Skywire, and can be advantageous for designers that use SSH or Telnet to communicate with the Linux PC. Since the standard PPP and CDC\_ECM procedures involve disabling network interfaces, the Linux PC loses its ability to communicate over Ethernet. By isolating

the Ethernet over USB connection using a Linux Namespace, the problem of having to take down the Ethernet interface on the Linux PC is avoided during testing.

**Note:** *It is possible to leave network interfaces enabled on the Linux PC, while ensuring that the cellular data connection is the primary source of Internet connectivity. This involves replacing the default route in the kernel's IP routing table with the PPP, or CDC\_ECM connection. However, these steps are not covered by this application note.*



The alternate methods involving Linux Namespaces are meant for testing and prototyping use only. It is not recommended to utilize Linux Namespaces in the production implementation of an Ethernet over USB connection. Instead, follow the standard procedure(s) when designing an implementation for production devices.

## 2.2 Skywire Modem Setup

### 2.2.1 Prepare the Hardware

Ensure that the modem has an activated SIM card inserted into the SIM slot, or that the modem's soldered-down SIM is active.

Power on the modem and allow it to boot up. Using a Linux terminal or another preferred method, open a serial or USB connection to the Skywire.

- SWDK Users: Refer to the SWDK user manual for detailed setup instructions:

[https://nimbelink.com/Documentation/Development\\_Kits/NL-SWDK/30005\\_NL-SWDK\\_UserManual.pdf](https://nimbelink.com/Documentation/Development_Kits/NL-SWDK/30005_NL-SWDK_UserManual.pdf)

- Ensure that the active firmware image corresponds to the SIM card in use. Section 3.9 of the NL-SW-LTE-TG1WWG datasheet contains information regarding the dual image firmware:

[https://nimbelink.com/Documentation/Skywire/4G\\_LTE\\_Cat\\_M1\\_Telit/1002934\\_NL-SW-LTE-TG1WWG\\_Datasheet.pdf](https://nimbelink.com/Documentation/Skywire/4G_LTE_Cat_M1_Telit/1002934_NL-SW-LTE-TG1WWG_Datasheet.pdf)

### 2.2.2 Configure the Modem's USB Composition

Depending on the networking protocol being used, the Skywire's USB composition may need to be changed. That is, the modem must be configured so that the proper USB ports are available to the Linux host PC.

Open up a terminal emulator program on the Linux PC (picocom, PuTTY, etc.), and connect to the modem's USB or serial interface. Issue one of the following AT commands, depending on the networking protocol that has been chosen for testing:

- **PPP**

- Choose the firmware-default USB composition:

**AT#USBCFG=0**

- This composition enables the following USB ports:

**DIAG + ADB + MODEM + MODEM**

- The USB Product ID (PID) of this composition is:

**0x110A**



- **CDC\_ECM**

- Choose the following USB interface configuration:

**AT#USBCFG=3**

- The composition of this configuration is:

**DIAG + ADB + ECM + MODEM + MODEM**

- The USB Product ID (PID) of this composition is:

**0x110B**

**Note 1:** The USB Vendor ID for all Telit-based Skywire modems is **0x1b7c**, regardless of the current USB composition.

**Note 2:** See the AT command manual for the NL-SW-LTE-TG1WWG for further information regarding the "AT#USBCFG" command:

<https://nimbelink.com/Documentation/Skywire/4G LTE Cat 4 Telit/Telit LE910Cx AT Commands Reference Guide r2.pdf>

The table below summarizes the relevant information for each of the USB interface compositions described above:

Protocol	Required USB Composition	USB VID	USB PID
PPP	#USBCFG: 0	0x1b7c	0x110A
CDC_ECM	#USBCFG: 3	0x1b7c	0x110B

Once the USB composition has been changed, the modem will shut down and then reboot with the new composition. After the modem reboots, verify that the new configuration was applied correctly.

### 2.2.3 Verify Modem Enumeration

After changing the USB composition, verify that the modem has properly enumerated on the Linux PC. Type the following command into the Linux terminal:

**lsusb**

If the Skywire's USB interface has properly enumerated on the Linux PC, there should be a device listed that looks something like:

**Bus 001 Device 02: ID 1b7c:[PID] Telit Wireless Solutions**

Where "[PID]" is replaced with the PID that corresponds to the active USB interface composition. See the [table](#) above for possible PID's.

If a line similar to the one above appears, then the modem has properly enumerated on the Linux PC.

If a USB device does not appear, verify that the modem is powered on and that the USB interface is connected to the Linux PC. Then, retry the "**lsusb**" command.

If the modem still has not enumerated as expected on the Linux PC, try the troubleshooting step in the next section.

## 2.2.4 Load the “option” Driver (If Needed)

On older versions of Ubuntu and other Linux distributions, newer Skywire modems will sometimes fail to enumerate fully, if at all.

If the modem does not enumerate on the host PC, or if some of the modem's USB ports are missing from the Linux PC, the "option" driver must be loaded for the modem. Issue the following commands:

```
modprobe option
```

```
echo 1bc7 [PID] > /sys/bus/usb-serial/drivers/option1/new_id
```

Be sure to replace "[PID]" with the PID that corresponds to the active USB composition for the Skywire. See the [table](#) above for possible PID's.

In the case of an NL-SW-LTE-TG1WWG Skywire with the default USB composition, the above command would be:

```
echo 1bc7 110A > /sys/bus/usb-serial/drivers/option1/new_id
```

After issuing the above command, the Skywire's USB interface should now fully enumerate on the Linux PC.

At this point, the Linux PC and the Skywire are ready for the Ethernet over USB connection. [Section 3](#) contains instructions for PPP, [Section 4](#) contains instructions for CDC\_ECM.

**Note:** *If the modem still does not enumerate, then it is possible that the USB interface is damaged on the modem. For further assistance, please contact the following email:*

[product.support@nimbelink.com](mailto:product.support@nimbelink.com)

# 3. Point-to-Point Protocol (PPP)

## 3.1 Overview

Point-to-Point Protocol (PPP) is a communications protocol used to directly connect two devices together without any other networking devices placed in between. PPP is a data link layer protocol, and is designed to work with multiple network layer protocols, such as Internet Protocol (IP).

Section 3 describes how to set up PPP on an NL-SW-LTE-TG1WWG Skywire modem and a Linux host system like a PC, or a single-board computer (BeagleBone, Raspberry Pi, etc.).

**Note:** These instructions assume that the Linux host PC and the Skywire have both been set up according to [Section 2](#), and that the "pppd" package has been installed on the PC.

## 3.2 PPP Scripts

### 3.2.1 NimbeLink PPP Script GitHub Repository

NimbeLink has a library of PPP scripts available for customer use at the following link:

<https://github.com/NimbeLink/skywire-ppp-scripts>

NimbeLink recommends downloading this repository, and following the instructions on the GitHub page to set up the scripts.

To clone the repository, navigate to any desired directory, and enter the following command into the Linux terminal:

```
git clone https://github.com/NimbeLink/skywire-ppp-scripts.git
```

Alternatively, the contents of the PPP scripts can be copied directly from an Internet browser into the proper location on the Linux PC's filesystem. However, it is recommended to simply clone the repository.

### 3.2.2 Create PPP Scripts

As root user, navigate to the `/etc/ppp/peers` directory on the Linux host PC. This directory is where all of the PPP scripts for Skywire modems should be placed.

Next, identify the pair of PPP scripts that correspond to the carrier of the SIM card in use, and then copy those scripts to the `/etc/ppp/peers` directory.

The commands below demonstrate this operation, assuming that the PPP script repository was cloned into the home directory of the root user. Change the path to the `"skywire-ppp-scripts"` repository in the command below, if applicable:

*Verizon Users:*

```
cp ~/skywire-ppp-scripts/vzw-TG1WWG* /etc/ppp/peers
```

*AT&T Users:*

```
cp ~/skywire-ppp-scripts/att-TG1WWG* /etc/ppp/peers
```

*To Copy Both AT&T and Verizon Scripts:*

```
cp ~/skywire-ppp-scripts/*TG1WWG* /etc/ppp/peers
```

If the copying operation was done correctly, the NL-SW-LTE-TG1WWG PPP scripts should now be in the `"/etc/ppp/peers"` directory.

Verify this by comparing the contents of the `"/etc/ppp/peers"` with the list of required PPP scripts below:


*Required Verizon PPP Scripts:*

- `"vzw-TG1WWG-chat"`
- `"vzw-TG1WWG"`

*Required AT&T PPP Scripts:*

- `"att-TG1WWG-chat"`
- `"att-TG1WWG"`

For example, the image below depicts the contents of the `"/etc/ppp/peers"` directory with the two required AT&T scripts:

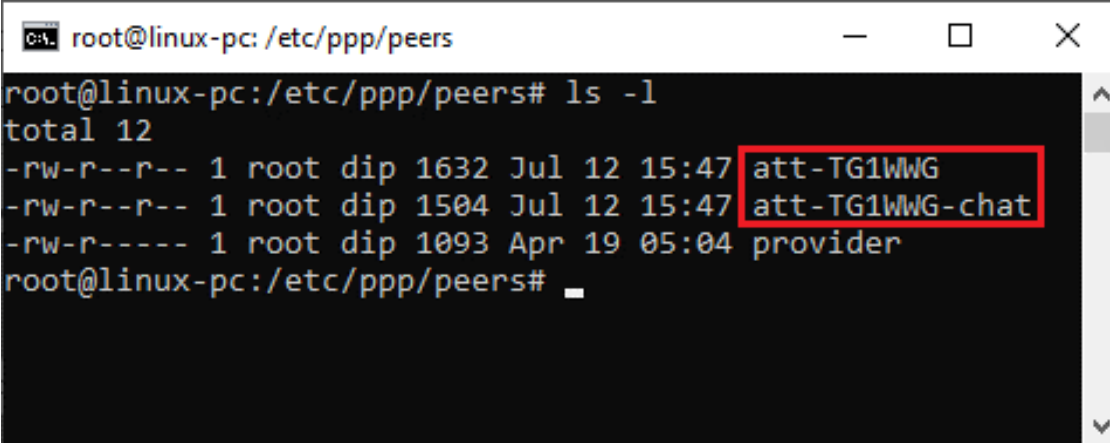A terminal window titled 'root@linux-pc: /etc/ppp/peers' showing the output of the command 'ls -l'. The output lists three files: 'att-TG1WWG' and 'att-TG1WWG-chat' (both highlighted with a red box), and 'provider'. The permissions for the first two files are '-rw-r--r--' and for 'provider' is '-rw-r-----'. The terminal prompt is 'root@linux-pc:/etc/ppp/peers#'.

### 3.2.3 Edit the `"x-TG1WWG-chat"` Scrip

Before using the scripts, the `"x-TG1WWG-chat"` file must be edited to add the proper APN for the cellular connection. Replace `"x"` in the filename with either `"att"` or `"vzw"`, depending on the SIM card being used.

Open the `"x-TG1WWG-chat"` file with a preferred text editor, and find the line that says:

AT&T Users:


- OK AT+CGDCONT=1,"IP","[apn]"

Verizon Users:

- OK AT+CGDCONT=3,"IP","[apn]"

Replace "[apn]" with the proper APN for the chosen SIM card and cellular carrier.

For example, the image below depicts an edited "att-TG1WWG-chat" file with the proper APN set for an AT&T SIM card purchased through NimbeLink:

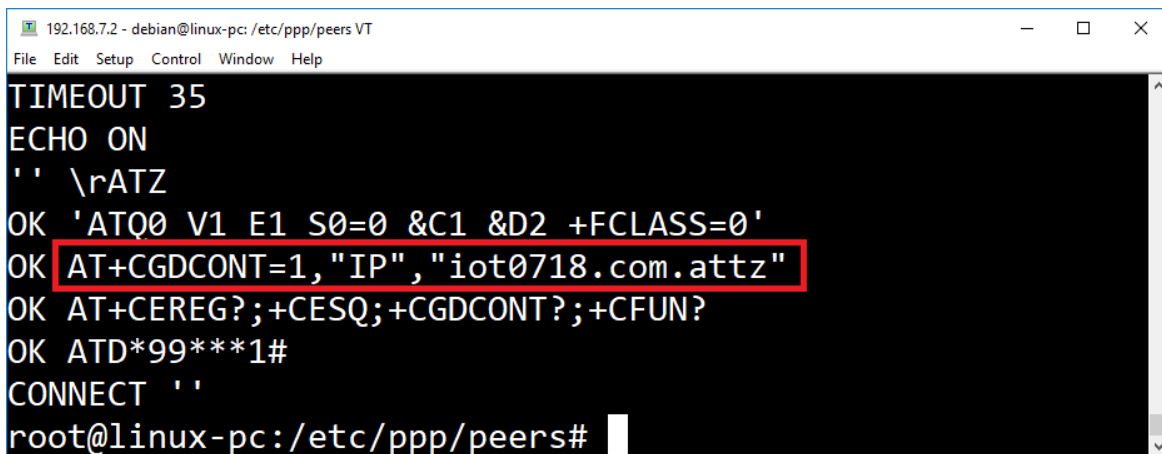

```
192.168.7.2 - debian@linux-pc: /etc/ppp/peers VT
File Edit Setup Control Window Help
TIMEOUT 35
ECHO ON
'' \rATZ
OK 'ATQ0 V1 E1 S0=0 &C1 &D2 +FCLASS=0'
OK AT+CGDCONT=1,"IP","iot0718.com.attz"
OK AT+CEREG?;+CESQ;+CGDCONT?;+CFUN?
OK ATD*99***1#
CONNECT ''
root@linux-pc:/etc/ppp/peers#
```

### 3.2.4 Edit the "x-TG1WWG" Script

Next, the "x-TG1WWG" file may need to be updated to reflect the proper port for the PPP session. Replace "x" in the filename with either "att" or "vzw", depending on the SIM card being used.

Open this file with a preferred text editor, and change the line that says `"/dev/ttyUSB3"` to reflect the port to which the modem enumerated (if necessary).

For instance, if the modem enumerated to the `"/dev/ttyACM0"` port, this port should be specified in the "x-TG1WWG" file.

## 3.3 Choose a PPP Implementation

After the PPP scripts have been copied and edited as described above, they are ready to be used for the PPP session. Choose one of the following sections to continue:

[Section 3.4: Standard PPP Procedure](#)

- **This is the standard PPP setup procedure that should be used for production implementations of PPP.**
- This method also works well for testing, provided that the user is not using SSH or Telnet to communicate with the Linux PC over Ethernet.

### [Section 3.5](#): Alternate PPP Procedure for Testing Purposes

- This is an alternate method for setting up PPP meant for testing only. Do not use this method for production implementations of PPP.
- This method is useful for readers who use SSH or Telnet to communicate with the Linux PC over Ethernet, because it won't sever that communication path like the standard PPP procedure does.

Additionally, [Section 3.6](#) contains troubleshooting tips that may be useful when attempting to start the PPP session.

## 3.4 Standard PPP Procedure

### 3.4.1 Take down Network Interfaces

**Note:** *This step will sever the communication path over Ethernet with the Linux PC.*

Issue the following command in the Linux terminal:

```
ifconfig
```

If needed, install with **sudo apt install net-tools**.

This command lists all currently active network interfaces. Take note of each entry that is populated in the response to the above command.

Disable each interface that may provide an Internet connection to the Linux PC. Issue the following command to take each interface down:

```
ifconfig [interface] down
```

Replace "[interface]" with the name of the interface that is to be disabled. Common network interfaces are: **eth#**, **enp##**, **wlan#**, **wwan#**, etc.

Once the network interfaces have been disabled, check the PC's Internet connectivity using the Linux terminal:

```
ping 8.8.8.8 -c 5
```

This will cause the Linux PC to attempt to ping Google's public DNS server five times. If all of the relevant network interfaces have been disabled, the ping attempt will fail.

If the ping attempt succeeds, then verify that all relevant network interfaces have been disabled with the "**ifconfig [interface] down**" command.

Once all sources of Internet connectivity have been disabled, the PPP session can be tested properly.

### 3.4.2 Start the PPP Session

Start the PPP session with the following command:

```
pon [ppp script]
```

Replace "[ppp script]" with one of the following filenames, depending on the carrier of the chosen SIM card:

Verizon Users: "vzw-TG1WWG"

AT&T Users: "att-TG1WWG"

This command will start the pppd daemon, which will configure the PPP connection, and set it as the default network connection.


**Note:** Ensure that the modem does not have an active PDP context when starting the PPP script. This will cause the PPP script to encounter an error and freeze up.

### 3.4.3 Test the PPP Session

To test that the PPP connection is working properly, issue the ping command once more:

```
ping 8.8.8.8 -c 5
```

If the PPP session was successful, the response should look something like:

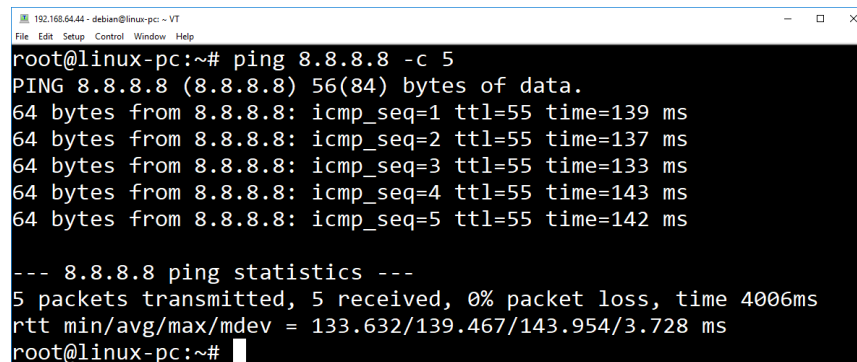

```
192.168.64.44 - debien@linux-pc - VT
File Edit Setup Control Window Help
root@linux-pc:~# ping 8.8.8.8 -c 5
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=55 time=139 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=55 time=137 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=55 time=133 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=55 time=143 ms
64 bytes from 8.8.8.8: icmp_seq=5 ttl=55 time=142 ms

--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4006ms
rtt min/avg/max/mdev = 133.632/139.467/143.954/3.728 ms
root@linux-pc:~#
```

### 3.4.4 Close the PPP Connection

To close the PPP connection, simply issue this command:

```
poff
```

It is a good idea to close a PPP session whenever it is no longer needed. This will prevent accidental usage of cellular data.

**Note:** This concludes the standard implementation of PPP for NL-SW-LTE-TG1WWG Skywire modems.

## 3.5 Alternate Procedure for Testing PPP

This section describes a different PPP setup process that allows the user to properly test the PPP connection without taking down the Ethernet interface on the Linux PC.



*The demonstration of the alternate PPP setup is meant for testing and prototyping purposes only. It is not recommended to implement PPP using Linux namespaces for final production devices. If a communication path over Ethernet is required for production devices, additional Linux networking steps (beyond those covered in this guide) may be required.*

### 3.5.1 Create a Network Namespace

Create a Network namespace called "ppp-testing" on the Linux host PC, type the following command:

```
ip netns add ppp-testing
```

If desired, replace "ppp-testing" with any descriptive name for the new namespace.

This new namespace is completely isolated from any of the current network interfaces present on the Linux PC. To demonstrate this, issue the following command:

```
ip netns exec ppp-testing ifconfig
```

No network interfaces should appear as a result of the above command.

### 3.5.2 Start the PPP Session

Next, start the PPP session within the namespace with the following command:

```
ip netns exec ppp-testing pon <ppp script>
```

Replace "<ppp script>" with one of the filenames below:

*Verizon Users:*

- "vzw-TG1WWG"

*AT&T Users:*

- "att-TG1WWG"

This command will start the pppd daemon, which will configure the PPP connection, and set it as the default network connection for the namespace.

**Note:** Ensure that the modem does not have an active PDP context when starting the PPP script. This will cause the PPP script to encounter an error and freeze up.




### 3.5.3 Test the PPP Connection

There should now be a "ppp0" interface contained within the "ppp-testing" network namespace. To check this, issue the following command:

```
ip netns exec ppp-testing ifconfig
```

The terminal should respond with something similar to:

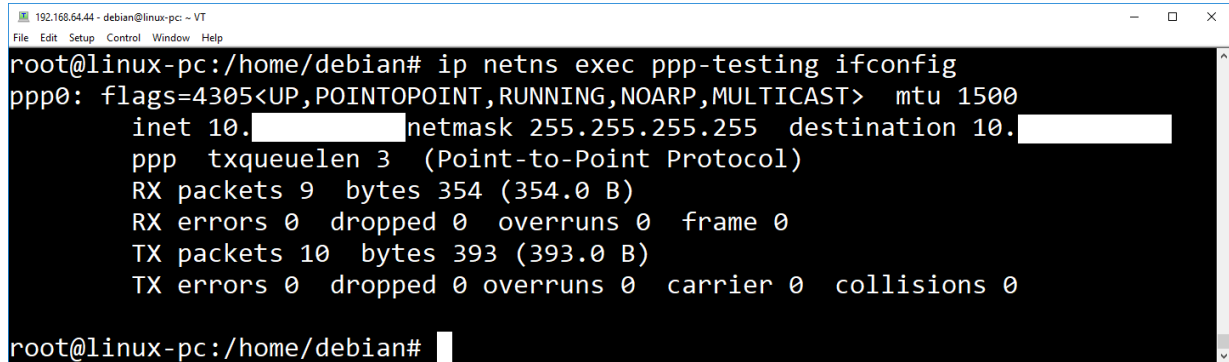

```
root@linux-pc:/home/debian# ip netns exec ppp-testing ifconfig
ppp0: flags=4305<UP,POINTOPOINT,RUNNING,NOARP,MULTICAST> mtu 1500
    inet 10.1.1.1 netmask 255.255.255.255 destination 10.1.1.2
    ppp txqueuelen 3 (Point-to-Point Protocol)
    RX packets 9  bytes 354 (354.0 B)
    RX errors 0  dropped 0  overruns 0  frame 0
    TX packets 10  bytes 393 (393.0 B)
    TX errors 0  dropped 0 overruns 0  carrier 0  collisions 0

root@linux-pc:/home/debian#
```

The "ppp0" interface should be the only active network interface listed for the "ppp-testing" network namespace, as seen in the image above.

For the sake of demonstration, query the network interfaces for the Linux PC (outside of the "ppp-testing" network namespace) using the following command:

```
ifconfig
```


The "ppp0" network interface should not be listed as a network interface for the Linux PC in the response to the above command.

This is because the PPP session was run in the "container" of the Linux namespace that was created for the testing, and is not visible to anything outside of the "ppp-testing" network namespace.

To test that the PPP connection is functioning properly, issue the following command:

```
ip netns exec ppp-testing ping 8.8.8.8 -c 5
```

This command will ping Google's public DNS server in order to test the connection. The response to the ping command should look something like the image below:

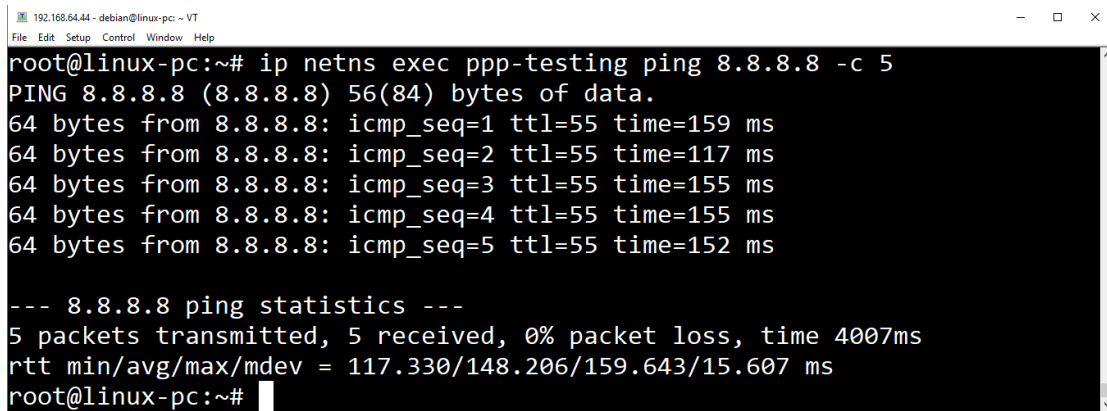A terminal window titled '192.168.64.44 - debian@linux-pc - VT' with a menu bar (File, Edit, Setup, Control, Window, Help). The terminal shows the command 'ip netns exec ppp-testing ping 8.8.8.8 -c 5' and its output. The output shows five successful ping requests to 8.8.8.8, each with 64 bytes of data and varying response times. A summary line shows '5 packets transmitted, 5 received, 0% packet loss, time 4007ms' and an RTT summary. The prompt 'root@linux-pc:~#' is visible at the bottom.

```
root@linux-pc:~# ip netns exec ppp-testing ping 8.8.8.8 -c 5
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=55 time=159 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=55 time=117 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=55 time=155 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=55 time=155 ms
64 bytes from 8.8.8.8: icmp_seq=5 ttl=55 time=152 ms

--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4007ms
rtt min/avg/max/mdev = 117.330/148.206/159.643/15.607 ms
root@linux-pc:~#
```

If the ping command produces results similar to the image above, then it is safe to say that the Internet connection has been established.

### 3.5.4 Close the PPP Connection

To close the PPP connection, simply issue this command:

```
ip netns exec ppp-testing poff
```

It is a good idea to close a PPP session whenever it is no longer needed. This will prevent accidental usage of cellular data.

### 3.5.5 Delete the Linux Namespace

To delete the Linux namespace, issue the following command:

```
ip netns del ppp-testing
```

The Linux namespace will also be deleted upon reboot of the Linux PC, so it is not entirely necessary to delete it after testing has concluded.

## 3.6 PPP Troubleshooting

If the PPP scripts get hung up:




```
Select root@linux-pc: /etc/ppp/peers
root@linux-pc:/etc/ppp/peers# pon att-TG1WWG
ATZ
OK
ATQ0 V1 E1 S0=0 &C1 &D2 +FCLASS=0
OK
AT+CGDCONT=1,"IP","iot0718.com.attz"
ERROR
```

1. If the Skywire has an active PDP context, the PPP scripts will freeze like this.
  - a. To fix this, open a serial or USB connection to the modem, and instruct the modem to reboot:

**AT#REBOOT**

2. The modem should be freshly powered up, or rebooted each time a PPP session is started

If the PPP scripts timeout:

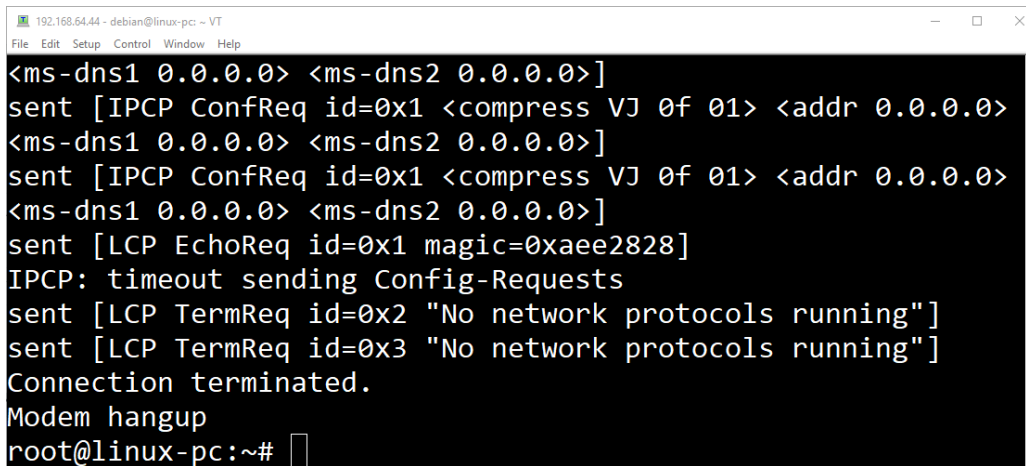

```
192.168.64.44 - debian@linux-pc: ~ VT
File Edit Setup Control Window Help
<ms-dns1 0.0.0.0> <ms-dns2 0.0.0.0>]
sent [IPCP ConfReq id=0x1 <compress VJ 0f 01> <addr 0.0.0.0>
<ms-dns1 0.0.0.0> <ms-dns2 0.0.0.0>]
sent [IPCP ConfReq id=0x1 <compress VJ 0f 01> <addr 0.0.0.0>
<ms-dns1 0.0.0.0> <ms-dns2 0.0.0.0>]
sent [LCP EchoReq id=0x1 magic=0xae2828]
IPCP: timeout sending Config-Requests
sent [LCP TermReq id=0x2 "No network protocols running"]
sent [LCP TermReq id=0x3 "No network protocols running"]
Connection terminated.
Modem hangup
root@linux-pc:~#
```

1. This type of error is generally caused by attempting to start the PPP session too soon after the Skywire has booted.
  - a. To fix this, wait 5-10 seconds after the modem is responsive before starting the PPP scripts.

## 4. CDC\_ECM

### 4.1 Overview

The Communication Device Class Ethernet Control Model (CDC\_ECM) is a USB communication protocol developed by the USB Implementers Forum. This protocol enables the sending and receiving of IEEE 802.3 Ethernet frames over a USB bus.

For more information regarding this communication protocol, please refer to the CDC specification at the following link:

<https://www.usb.org/document-library/cdc-subclass-specification-ethernet-emulation-model-devices-10>

Section 4 describes how to set up CDC\_ECM on an NL-SW-LTE-TG1WWG Skywire modem and a Linux host system like a PC, or a single-board computer (BeagleBone, Raspberry Pi, etc.).

**Note:** These instructions assume that the Linux host PC and the Skywire have both been set up according to [Section 2](#). No additional packages are required to use CDC\_ECM.

### 4.2 Preliminary Skywire Configuration

#### 4.2.1 Verify USB Composition

In order for CDC\_ECM to work with the Skywire, the USB composition must be set correctly on the modem.

The USB composition should have been set correctly in [Section 2.2.2](#), but it is a good idea to verify it either way. Issue the following command:

**AT#USBCFG?**

The modem should respond with the following:

**#USBCFG: 3**

If the USB composition is set correctly, proceed to [Section 4.2.2](#). Otherwise, issue the following command to obtain the proper setting:

**AT#USBCFG=3**

The modem must be rebooted for the correct composition to take effect. Issue the command:

**AT#REBOOT**

The modem will then reboot with the correct composition. Once the AT command parser is responsive, issue the "AT#USBCFG?" command again to verify that the correct setting is selected.

### 4.2.2 Configure a PDP Context

A PDP context must be configured on the modem before starting the CDC\_ECM session. To do so, issue one of the following AT commands, depending on the SIM card in use, and the currently active firmware image:

*Verizon Users:*

**AT+CGDCONT=3,"IPV4V6","[APN]"**

*AT&T Users:*

**AT+CGDCONT=1,"IPV4V6","[APN]"**

Replace "[APN]" with the APN for the currently selected SIM card.

To make sure the PDP context was configured properly, query the PDP context and verify that the APN is correct:

**AT+CGDCONT?**

### 4.2.3 Activate CDC\_ECM

The final step during the Skywire configuration process is to enable CDC\_ECM on the modem. To do so, issue the following command, depending on the SIM card in use, and the currently active firmware image:

*Verizon Users:*

**AT#ECM=3,0**

*AT&T Users:*

**AT#ECM=1,0**

The first argument to this command specifies the PDP context to use for the CDC\_ECM session, and the second argument is the "Device ID", which is firmware-limited to a value of "0".

The modem will take a second or two to process this command, but will eventually respond with "OK". After this command has successfully been entered, the modem is ready for the CDC\_ECM connection.

If the modem returns an error when issuing this command, refer to [Section 4.6](#) for further troubleshooting information.

## 4.3 Choose a CDC\_ECM Implementation

After the preliminary Skywire configuration steps have been completed, the modem is ready for the CDC\_ECM session. Choose one of the following sections to continue:

[Section 4.4](#): Standard CDC\_ECM Procedure

- **This is the standard CDC\_ECM setup procedure that should be used for production implementations of CDC\_ECM.**
- This method also works well for testing, provided that the user is not using SSH or Telnet to communicate with the Linux PC over Ethernet.

[Section 4.5](#): Alternate CDC\_ECM Procedure for Testing Purposes

- **This is an alternate method for setting up CDC\_ECM meant for testing only. Do not use this method for production implementations of CDC\_ECM.**
- This method is useful for readers who use SSH or Telnet to communicate with the Linux PC over Ethernet, because it won't sever that communication path like the standard CDC\_ECM procedure does.

Additionally, [Section 4.6](#) contains troubleshooting tips that may be useful when attempting to start the CDC\_ECM session.

## 4.4 Standard CDC\_ECM Procedure

### 4.4.1 Take down Network Interfaces

**Note:** *This step will sever the communication path over Ethernet with the Linux PC.*

Issue the following command in the Linux terminal:

```
ifconfig
```

This command will list all currently active network interfaces. Take note of each of the entries that are populated in the response to the above command.

Bring down each interface that may be providing an Internet connection to the Linux PC. Issue the following command to take each interface down:

```
ifconfig [interface] down
```

Replace "[interface]" with the name of the interface that is to be disabled. Common network interfaces are: **eth#**, **enp#s#**, **wlan#**, etc.

Once the network interfaces have been disabled, check the PC's Internet connectivity:

```
ping 8.8.8.8 -c 5
```

This will cause the Linux PC to attempt to ping Google's public DNS server five times.

If all of the relevant network interfaces have been disabled, the ping attempt will fail.

If the ping attempt succeeds, verify that all relevant network interfaces have been disabled with the "**ifconfig [interface] down**" command.

Once all sources of Internet connectivity have been disabled, the CDC\_ECM session can be tested properly.

#### **4.4.2 Identify the wwan[#] Interface**

In the current USB composition setting, the modem's ECM USB port should have enumerated as a Wireless Wide Area Network (WWAN) device on the Linux PC. To check this, issue the following command:

```
ifconfig -a
```

This will query the network interfaces on the Linux PC, even those that are currently disabled. The response to this command should list several network interfaces, including those that were disabled in [Section 4.4.1](#).

Among those disabled network interfaces should be a "**wwan[#]**" interface, typically "**wwan0**". This is modem's USB ECM interface.

#### **4.4.3 Enable the wwan# Interface**

First, flush any existing IP address information that may be associated with the "**wwan[#]**" network interface. Send the following command to the Linux PC after replacing **[#]** with the proper number::

```
ip addr flush dev wwan[#]
```

Then, enable the "**wwan[#]**" interface with the following command:

```
ifconfig wwan[#] up
```

Afterwards, issue this command to verify that the "**wwan[#]**" network interface was enabled correctly:

```
ifconfig
```

The "**wwan[#]**" interface should be listed as an active network interface. See the image below for reference:

```
COM85:115200bps - Tera Term VT
File Edit Setup Control Window Help
root@linux-pc:~# ifconfig
wwan0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1430
    inet6 fe80::[redacted] prefixlen 64 scopeid 0x20<link>
    ether c2:[redacted] txqueuelen 1000 (Ethernet)
    RX packets 46  bytes 5285 (5.1 KiB)
    RX errors 0  dropped 0  overruns 0  frame 0
    TX packets 178  bytes 32922 (32.1 KiB)
    TX errors 0  dropped 0  overruns 0  carrier 0  collisions 0

root@linux-pc:~#
```

#### 4.4.4 Dynamically Configure IP Address of wwan[#] Interface

The final step is to dynamically configure the IP Address of the "wwan[#]" interface using "dhclient". The link below points to the manpage for this tool:

<https://linux.die.net/man/8/dhclient>

This tool allows the Linux PC to automatically configure a private IP address for the "wwan[#]" network interface using a DHCP server that is provided by the cellular module.

To do so, issue the following command to the Linux terminal:

```
dhclient -i -v wwan[#]
```

The command response should be something like:

```
COM85:115200bps - Tera Term VT
File Edit Setup Control Window Help
root@linux-pc:~# dhclient -i -v wwan0
Internet Systems Consortium DHCP Client 4.3.5
Copyright 2004-2016 Internet Systems Consortium.
All rights reserved.
For info, please visit https://www.isc.org/software/dhcp/

Listening on LPF/wwan0/c2:[redacted]
Sending on   LPF/wwan0/c2:[redacted]
Sending on   Socket/fallback
DHCPDISCOVER on wwan0 to 255.255.255.255 port 67 interval 7
DHCPREQUEST of 192.168.225.41 on wwan0 to 255.255.255.255 port 67
DHCPOFFER of 192.168.225.41 from 192.168.225.1
DHCPACK of 192.168.225.41 from 192.168.225.1
bound to 192.168.225.41 -- renewal in 19647 seconds.
root@linux-pc:~#
```

In the above image, it can be seen that the "wwan0" network interface was assigned a private IP address of "192.168.225.41" within the subnet generated by the modem.



If "dhclient" was successful in assigning a private IP address to the modem, the CDC\_ECM connection should now be up and running.


If "dhclient" was not successful in assigning a private IP address, make sure that the modem has the proper APN set in the PDP context, and that "AT#ECM" has been set properly as per [Section 4.2.3](#).

#### 4.4.5 Test the CDC\_ECM Connection

To test that the CDC\_ECM connection is working properly, issue the following command:

```
ping 8.8.8.8 -c 5
```

If the CDC\_ECM session was successful, the response should look something like:

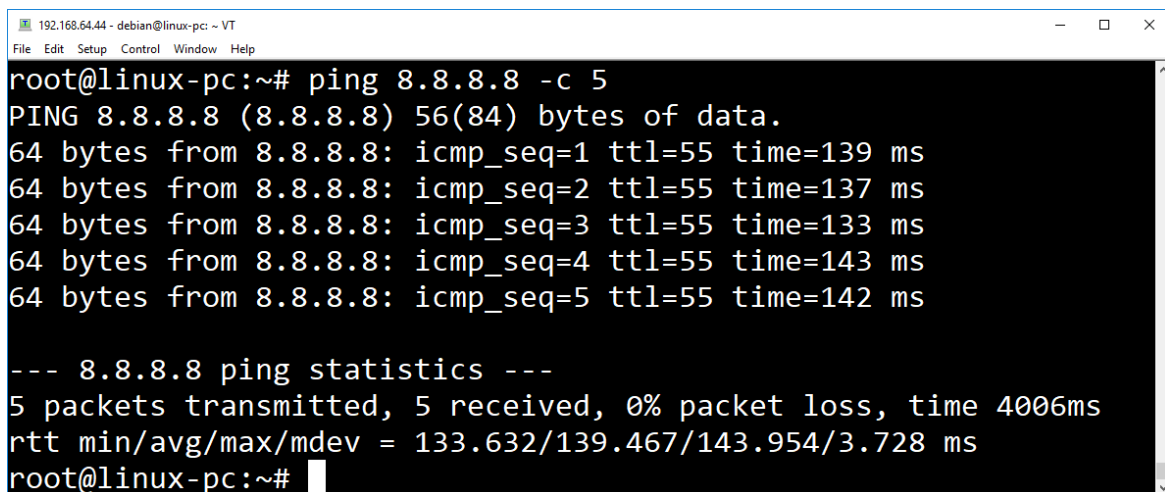A screenshot of a terminal window titled "192.168.64.44 - debian@linux-pc: ~ VT". The terminal shows the execution of the command "ping 8.8.8.8 -c 5". The output displays five successful ping responses from 8.8.8.8, each with a TTL of 55 and varying times (139 ms, 137 ms, 133 ms, 143 ms, 142 ms). Below the individual responses, it shows "ping statistics" for 8.8.8.8: 5 packets transmitted, 5 received, 0% packet loss, and a total time of 4006ms. The round-trip times (rtt) are listed as min/avg/max/mdev = 133.632/139.467/143.954/3.728 ms. The prompt "root@linux-pc:~#" is visible at the bottom.

```
root@linux-pc:~# ping 8.8.8.8 -c 5
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=55 time=139 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=55 time=137 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=55 time=133 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=55 time=143 ms
64 bytes from 8.8.8.8: icmp_seq=5 ttl=55 time=142 ms

--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4006ms
rtt min/avg/max/mdev = 133.632/139.467/143.954/3.728 ms
root@linux-pc:~#
```

#### 4.4.6 Close the CDC\_ECM Connection

To stop the CDC\_ECM session simply issue the following AT command to the modem:

```
AT#ECMD=0
```

To return to the default USB configuration issue the command:

```
AT#USBCFG=0
```

The modem must then again be rebooted by issuing the command:

```
AT#REBOOT
```

This will turn off CDC\_ECM mode on the modem and reboot the modem. Next issue the following command to the Linux PC to close the dhclient session:

```
dhclient -r
```

It is a good idea to close a CDC\_ECM session whenever it is no longer needed. This will prevent accidental usage of cellular data.

**Note:** This concludes the standard implementation of CDC\_ECM on an NL-SW-LTE-TG1WWG Skywire.

## 4.5 Alternate CDC\_ECM Procedure

This section describes a different CDC\_ECM setup process that allows the user to properly test the CDC\_ECM connection without taking down the Ethernet interface on the Linux PC.



***The demonstration of the alternate CDC\_ECM setup is meant for testing and prototyping purposes only. It is not recommended to implement CDC\_ECM using Linux namespaces for final production devices. If a communication path over Ethernet is required for production devices, additional Linux networking steps (beyond those covered in this guide) may be required.***

### 4.5.1 Create a Linux Namespace

Create a Network namespace called "cdc\_ecm-testing" on the Linux host PC, type the following command:

```
ip netns add cdc_ecm-testing
```

If desired, replace "cdc\_ecm-testing" with any descriptive name for the new namespace.

This new namespace is completely isolated from any of the current network interfaces present on the Linux PC. To demonstrate this, issue the following command:

```
ip netns exec cdc_ecm-testing ifconfig
```

No network interfaces should appear as a result of the above command.

### 4.5.2 Identify the wwan[#] Interface

In the current USB composition setting, the modem's ECM USB port should have enumerated as a Wireless Wide Area Network (WWAN) device on the Linux PC. To check this, issue the following command:

```
ifconfig -a
```

This will query the network interfaces on the Linux PC, even those that are currently disabled.

Among those disabled network interfaces should be a "wwan[#]" interface, typically "wwan0". This is modem's USB ECM interface.

### 4.5.3 Pass the wwan[#] Interface to the Linux Namespace

The "wwan[#]" network interface must be passed into the "cdc\_ecm-testing" Linux namespace. To do so, issue the following command after replacing [#] with the proper number:

```
ip link set wwan[#] netns cdc_ecm-testing
```

To check to see if the above command was successful, issue the following command:

```
ip netns exec cdc_ecm-testing ifconfig -a
```

The "wwan[#]" interface should appear in the response to the above command. If it does, then the "ip link set ..." command was successful.

If the "ip link set ..." command was not successful, verify that the "wwan[#]" interface has enumerated on the Linux PC correctly. Also verify that the modem has the correct USB composition, as per the instructions in [Section 2.2.2](#).

### 4.5.4 Enable the wwan[#] Interface

Flush any existing IP address information that may be associated with the "wwan[#]" network interface. Send the following command to the Linux PC after replacing [#] with the proper number:

```
ip netns exec cdc_ecm-testing ip addr flush dev wwan[#]
```


Then, enable the "wwan[#]" interface with the following command:

```
ip netns exec cdc_ecm-testing ifconfig wwan[#] up
```

Afterwards, issue this command to verify that the "wwan[#]" network interface was enabled correctly:

```
ip netns exec cdc_ecm-testing ifconfig
```

The "wwan[#]" interface should be listed as an active network interface. See the image below for reference:

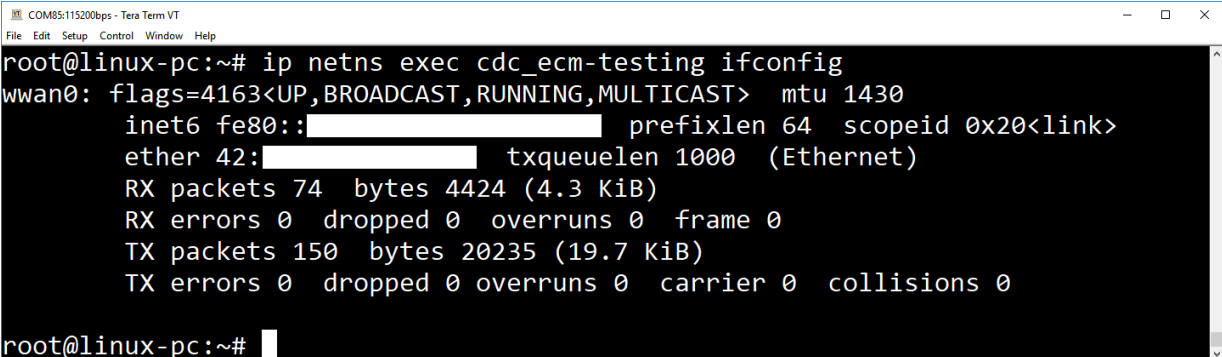

```
COM85:115200bps - Tera Term VT
File Edit Setup Control Window Help
root@linux-pc:~# ip netns exec cdc_ecm-testing ifconfig
wwan0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1430
    inet6 fe80:: prefixlen 64 scopeid 0x20<link>
    ether 42: txqueuelen 1000 (Ethernet)
    RX packets 74 bytes 4424 (4.3 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 150 bytes 20235 (19.7 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
root@linux-pc:~#
```

## 4.5.5 Dynamically Configure IP Address of wwan[#] Interface

The final step is to dynamically configure the IP Address of the "wwan[#]" interface using "dhclient". The link below contains the manpage for this tool:


<https://linux.die.net/man/8/dhclient>

This tool allows the Linux PC to automatically configure a private IP address for the "wwan[#]" network interface using a DHCP server that is provided by the cellular module.

To do so, issue the following command to the Linux terminal:

```
ip netns exec cdc_ecm-testing dhclient -i -v wwan[#]
```

The response the this command should be something like:

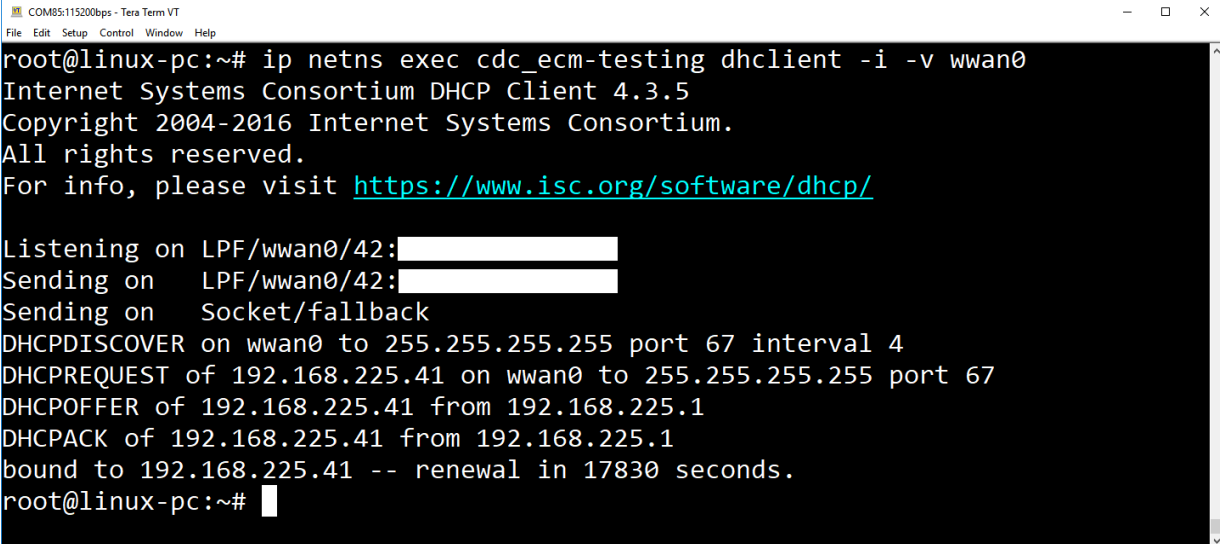

```
COM85:115200bps - Tera Term VT
File Edit Setup Control Window Help
root@linux-pc:~# ip netns exec cdc_ecm-testing dhclient -i -v wwan0
Internet Systems Consortium DHCP Client 4.3.5
Copyright 2004-2016 Internet Systems Consortium.
All rights reserved.
For info, please visit https://www.isc.org/software/dhcp/

Listening on LPF/wwan0/42:
Sending on   LPF/wwan0/42:
Sending on   Socket/fallback
DHCPDISCOVER on wwan0 to 255.255.255.255 port 67 interval 4
DHCPREQUEST of 192.168.225.41 on wwan0 to 255.255.255.255 port 67
DHCPOFFER of 192.168.225.41 from 192.168.225.1
DHCPACK of 192.168.225.41 from 192.168.225.1
bound to 192.168.225.41 -- renewal in 17830 seconds.
root@linux-pc:~#
```

In the above image, we can see that the "wwan0" network interface was assigned a private IP address of "192.168.225.41" within the subnet generated by the cellular modem.

If "dhclient" was successful in assigning a private IP address to the modem, the CDC\_ECM connection should now be up and running.


If "dhclient" was not successful in assigning a private IP address, make sure that the modem has the proper APN set in the PDP context, and that "AT#ECM" has been set properly as per [Section 4.2.3](#).

## 4.5.6 Test the CDC\_ECM Connection

To test that the CDC\_ECM connection is working properly, issue the following command:

```
ip netns exec cdc_ecm-testing ping 8.8.8.8 -c 5
```

If the CDC\_ECM session was successful, the response should look something like:

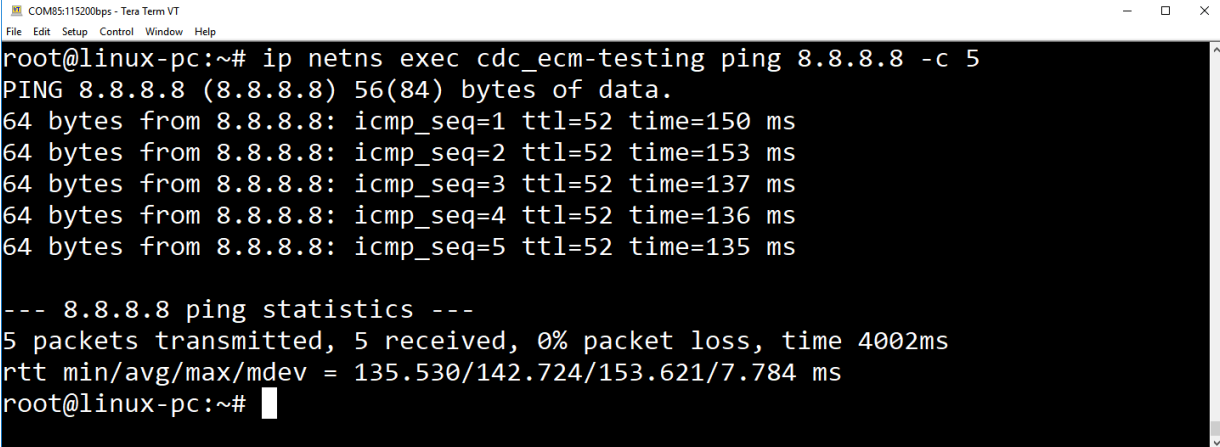

```
COM85:115200bps - Tera Term VT
File Edit Setup Control Window Help
root@linux-pc:~# ip netns exec cdc_ecm-testing ping 8.8.8.8 -c 5
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=52 time=150 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=52 time=153 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=52 time=137 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=52 time=136 ms
64 bytes from 8.8.8.8: icmp_seq=5 ttl=52 time=135 ms

--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4002ms
rtt min/avg/max/mdev = 135.530/142.724/153.621/7.784 ms
root@linux-pc:~#
```

## 4.5.7 Close the CDC\_ECM Connection

To stop the CDC\_ECM session simply issue the following AT command to the modem:

```
AT#ECMD=0
```

This will turn off CDC\_ECM mode on the modem. Next issue the following command to the Linux PC to close the dhclient session:

```
ip netns exec cdc_ecm-testing dhclient -r
```

It is a good idea to close a CDC\_ECM session whenever it is no longer needed. This will prevent accidental usage of cellular data.

## 4.5.8 Delete the Linux Namespace

To delete the Linux namespace, issue the following command:

```
ip netns del cdc_ecm-testing
```

The Linux namespace will also be deleted upon reboot of the Linux PC, so it is not entirely necessary to delete it after testing has concluded.

## 4.6 CDC\_ECM Troubleshooting

### If the "AT#ECM" command returns "ERROR"

- Verify that the USB composition is set properly on the modem.
  - Issue "AT#USBCFG" to the modem.
  - The modem should respond with "#USBCFG: 3"
  - If the modem's USB composition is set incorrectly, issue "AT#USBCFG=3" to swap to the proper configuration.
  - The modem will reboot with the correct composition.
- Verify that the modem does not have an active PDP context.
  - Issue "AT#SGACT?" to query active PDP contexts.
  - If the modem has an active PDP context, close it with one of the following commands:
    - *Verizon Firmware:*  
**AT#SGACT=3,0**
    - *AT&T Firmware:*  
**AT#SGACT=1,0**
  - After closing any open PDP contexts, issue "AT#ECMD=0" to ensure that any active CDC\_ECM sessions are closed.
  - Retry the "AT#ECM" command again.

## 5. Document Version Information

Revision	Description	Date
1	- Initial Release	10/21/2022