

M2MAX[®] C

Single Cell IP67 Antenna

M2MAX C is a fully rugged outdoor antenna designed specifically for M2M applications. This antenna provides best in class performance with a high gain cellular/LTE antenna inside a single robust and compact housing.

- 1 x Wideband Cellular/LTE Element
- Lower profile and smaller footprint than competing solutions
- Must be mounted on metal
- Available in black or white
- US Patent 10109918

Descriptions/Applications

The M2MAX C antenna builds on the best in class RF performance, leading design, features, and extended product life tradition of this highly successful product line. Ideal for kiosks, digital signage, wireless ATMs, vending machines, NEMA enclosures, industrial metering and other wireless machine to machine applications. This antenna has been designed to mount externally to an M2M or IoT enabled asset, and requires no servicing through its life time.



Full Outdoor Installation Ready


Compact and Robust UV Resistant Housing

Flexible Mounting Options

Customizable Cables and Connectors to Connect to Any Modem

Low loss cable accessories

Fast custom turnaround time

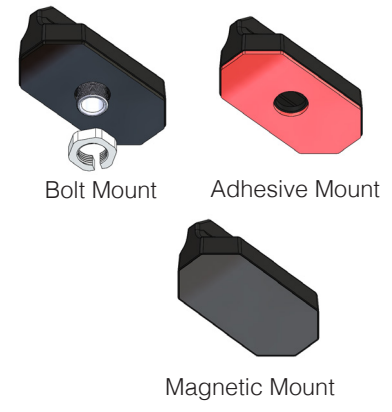

Standard Configurations

AP-M2M2-C-Q-S2-BL-15	MIMO Cell/LTE, Threaded bolt mount, SMA, Black, 15ft coax
AP-M2M2-C-A-S2-BL-15	MIMO Cell/LTE, Adhesive mount, SMA, Black, 15ft coax
AP-M2M2-C-M-S2-BL-15	MIMO Cell/LTE, Magnetic mount, SMA, Black, 15ft coax

Also available in color white, customizable cable lengths up to 35 feet, and other connector variations.

Electrical Data

Frequency Range	Element 1		698-960/1700-2700 MHz
Operational Bands	Element 1		LTE/Cellular
Peak Gain: Isotropic	Elements 1	698-960 MHz	3.0 dBi
		1710-2700 MHz	6.0 dBi

Environmental Data

Hazardous Substances	RoHS Compliant
Temperature	-40°C to 65°C (-40°F to + 149°F) Operating and Storage conformance to IEC 60068
Humidity (Non-Condensing)	5% to 96% Operating and Storage conformance to IEC 60068
Water Ingress	IP67
Military Spec	MIL-STD 810 conformance to vibration

Mounting Data

Dimensions	Height	2.19" (55.5mm)
	Width	2.56" (65mm)
	Length	4.84" (122.9mm)
Color	Black (BL) or White (WH)	

Cable Data

Cell/LTE Cables	Type	CFD195 Low Loss
	Diameter	0.195" (4.953 mm)
	Length	1 feet (0.3 m)
	Termination	SMA Male